

North Asian International Research Journal Consortium


North Asian International Research Journal

Of

Science, Engineering and Information Technology

Chief Editor

Dr. Bilal Ahmad Malik

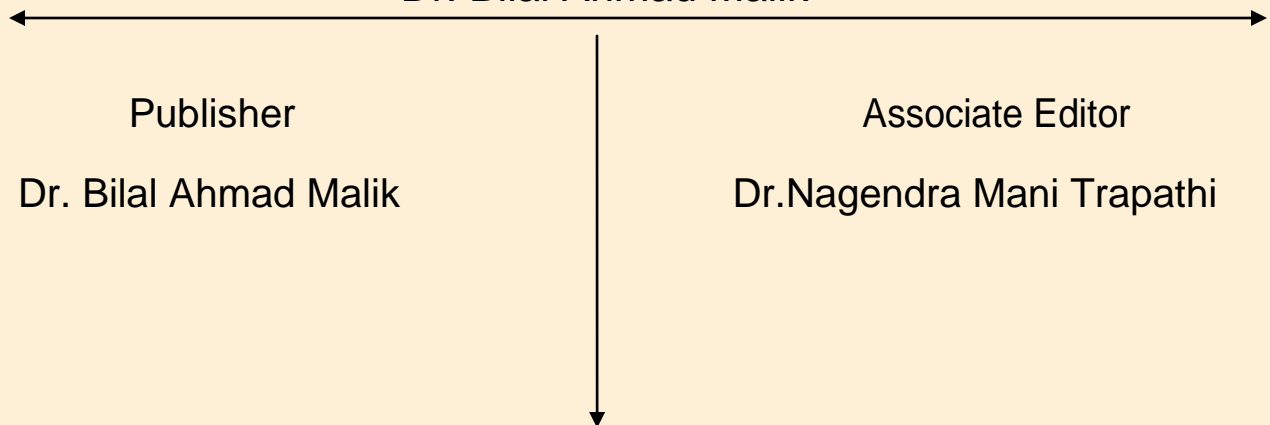

NAIRJC JOURNAL PUBLICATION

North Asian
International
Research Journal Consortium



Welcome to NAIRJC

ISSN NO: 2454 -7514

North Asian International Research Journal of Science, Engineering & Information Technology is a research journal, published monthly in English, Hindi. All research papers submitted to the journal will be double-blind peer reviewed referred by members of the editorial board. Readers will include investigator in Universities, Research Institutes Government and Industry with research interest in the general subjects

Editorial Board

M.C.P. Singh Head Information Technology Dr C.V. Rama University	S.P. Singh Department of Botany B.H.U. Varanasi.	A. K. M. Abdul Hakim Dept. of Materials and Metallurgical Engineering, BUET, Dhaka
Abdullah Khan Department of Chemical Engineering & Technology University of the Punjab	Vinay Kumar Department of Physics Shri Mata Vaishno Devi University Jammu	Rajpal Choudhary Dept. Govt. Engg. College Bikaner Rajasthan
Zia ur Rehman Department of Pharmacy PCTE Institute of Pharmacy Ludhiana, Punjab	Rani Devi Department of Physics University of Jammu	Moinuddin Khan Dept. of Botany Singhaniya University Rajasthan.
Manish Mishra Dept. of Engg, United College Ald.UPTU Lucknow	Ishfaq Hussain Dept. of Computer Science IUST, Kashmir	Ravi Kumar Pandey Director, H.I.M.T, Allahabad
Tihar Pandit Dept. of Environmental Science, University of Kashmir.	Abd El-Aleem Saad Soliman Desoky Dept of Plant Protection, Faculty of Agriculture, Sohag University, Egypt	M.N. Singh Director School of Science UPRTOU Allahabad
Mushtaq Ahmad Dept.of Mathematics Central University of Kashmir	Nisar Hussain Dept. of Medicine A.I. Medical College (U.P) Kanpur University	M.Abdur Razzak Dept. of Electrical & Electronic Engg. I.U Bangladesh

Address: -North Asian International Research Journal Consortium (NAIRJC) 221 Gangoo, Pulwama, Jammu and Kashmir, India - 192301, Cell: 09086405302, 09906662570, Ph. No: 01933-212815, Email: nairjc5@gmail.com, nairjc@nairjc.com, info@nairjc.com Website: www.nairjc.com

VERTICAL HANDOVER FOR NETWORK SELECTION IN HETEROGENEOUS NETWORK

HARPREET KAUR¹, ER. HARNEK SINGH² & DR. R. KASHYAP³

¹Student, dept. of ECE, RIEIT college, Railmajra, Punjab, India

²Lecturer, dept. of ECE, RIEIT college, Railmajra, Punjab, India

³HOD, dept. of ECE, RIEIT college, Railmajra, Punjab, India

Abstract - The next generation wireless network consist of terminals with multiple access interfaces and services which are used by mobile users moving between heterogeneous networks. The main issue in such type of environment is that “always best connection”. According to this, the mobile users need best connectivity anywhere at any time. In this paper, the handover strategies have been proposed, which helps the user in the selection of best network. The proposed algorithm is used for the decision making of handover process to the most suitable base station. The signal strength is kept at higher level than threshold level to minimize the redundant handovers. The proposed hysteresis method is compared with the existing received signal strength approach.

Keywords: LTE, WiMAX, Handover cycle, RSS, MMTT, RSS with hysteresis.

1. INTRODUCTION

Now-a-days, wireless networks are providing good and flexible communication over large distance. The

technologies which are used in these networks are developing more due to increasing demand of mobile users. These technologies are required to provide different services and applications with good quality of services. There are many types of technologies are available but the main technologies are WiMAX technology and LTE technology. WiMAX is a fourth generation standard and it is wireless broadband technology which support both licensed and unlicensed bands. It is useful where the high data rate and mobility services are required. The IEEE 802.16e standard is also known as mobile WiMAX. It supports 2.5GHz range of frequency and bandwidth of 5MHz -20MHz. The key feature of this technology is to provide high data rate and less delay, for this the OFDMA air interface is used with higher order modulation scheme i.e. 64 QAM. In this technology users have limited resources that are limited transmission power, limited number of antennas and limited computation capabilities, but the base station has higher transmission power, more number of antennas and more number of computational algorithms.

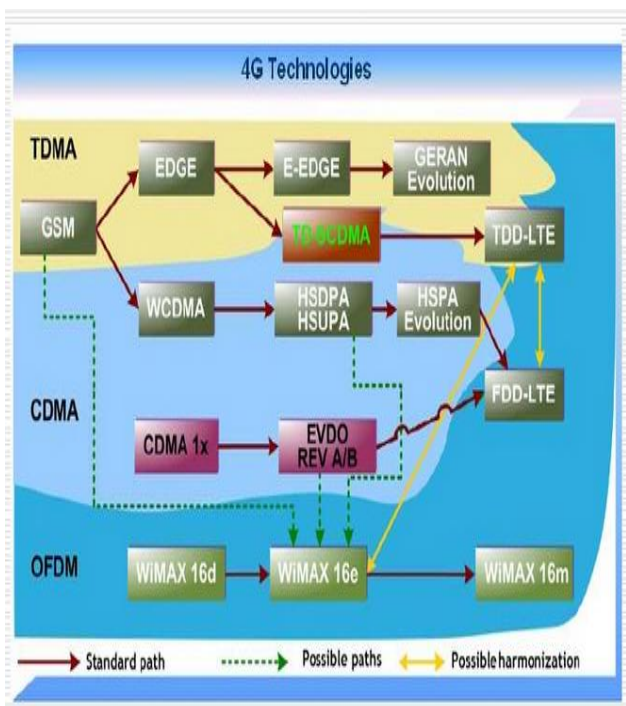


Fig-1: Evolution of WiMAX and LTE technologies

On the other hand, LTE is also a fourth generation standard, it is an advanced version of GSM and UMTS technologies. It has high speed data rate and more capacity which make it different from other technologies. LTE also stands for 4G LTE, which is five times faster than 3G. It can provide download speed up to 100mbps and upload speed of 50mbps. The LTE 4G networks uses different frequencies to transmit data. In this type of network it is able to stream videos without buffering. It uses OFDMA technique for transmitting more data on the same amount radio frequency. This technique is able to reduce latency and interference due to the use of different carriers by the users. The LTE can support 2GHz of frequency.

Table -1: Comparison between Wi-MAX and LTE

Parameters	Wi-MAX	LTE
Bandwidth	5MHz-20MHz	5MHz
Frame duration	10ms	5ms
Speed can handle	120 km/h	450 km/h
Compatibility	Not compatible with 2G and 3G	Compatible with 2G and 3G
Cost	Less	more
Deployment	Cheaper	costly
Data rate(uplink)	25Mbps	50 to 86.4Mbps
Frequency	2.5 GHz	2GHz
Data rate (downlink)	75 Mbps	100 to 326.4 Mbps

Now, the movement of mobile users from one technology to another i.e from WiMAX to LTE is known as vertical handover. To handle this handover process different approaches are used like RSS approach, MMTT approach etc. The approach which is introduced in this paper is the RSS with hysteresis value approach which provides better results than RSS approach.

1.1 Handover

It is a process in which mobile user moves from one base station to another due to this the point of

attachment of user changed, this process is known as handover. The wireless network is in the form of cells, therefore when the user transfers from one cell to another is also known as handoff. There four types of handover:

- **Soft handover:** It is based on make-before – break handover which means that the mobile node is able to communicating with multiple access networks simultaneously.
- **Hard handover:** It is based on the break-before-make handover which means that mobile node is connected to the new link after previous link is broken.
- **Horizontal handover:** The handover take place between the cells of same wireless access technology e.g. handover between two LTE cells. This is known as horizontal handover.
- **Vertical handover:** The handover occurred between the cells of different wireless access technologies e.g. handoff between WiMAX and LTE. This is known as vertical handover.

2. HANDOVER CYCLE

There are three handover phases:-

- a. Initiation phase
- b. Decision phase
- c. Execution phase

a. Initiation phase: The handover is initiated by mobile or network. If the received signal strength is below the threshold level then handoff is initiated by the mobile. But if there is heavy traffic on significant router then users are transferred to another router this type of handoff is initiated by the network.

b. Decision phase: In this phase, the target network is selected to which mobile node is transferred. The information regarding target network is collected and measurements are done on radio transmitters. On the basis of measurements of different parameters, the target network is selected.

c. Execution phase: After the network selection procedure, the new link is established between the mobile node and target base station. The current network transfers the information regarding mobile node to the target network. After that the mobile node is disconnected from the previous network and connected to the new one. In this phase, new registration and care of address is provided to the mobile node.

3. PREVIOUS APPROACHES FOR HAND OVER PROCESS

3.1 RSS Prediction Approach

In this approach only one parameter is required that is received signal strength (RSS) from mobile station (MS) to base station (BS). With the help of this approach, the RSS value from all nearest BSs is measured for n-intervals of time. After that, the BS

with highest RSS value is selected as target BS. The RSS value is calculated by using formula:

$$RSS_i (MS) = P_{Ti} + GR + G_{Ti} - P_{Li} - L_{Ti} - LR$$

Where $RSS_i (MS)$ is RSS value at MS from BS_i (target base station), P_{Ti} is the transmission power of BS_i , GR and G_{Ti} are the antenna gains of both MS and BS_i , P_{Li} is the path loss between BS_i and MS, L_{Ti} and LR are the thermal receiver noise in both BS_i and MS respectively.

The main disadvantage of this approach is that when the fluctuations occurred in the RSS value, the handoff is also fluctuated. Due to this the mobile users do not get the stable connection.

The vertical handover decision algorithm which is used in this approach is shown in following figure:

3.2 MMTT Approach

This approach is used to determine the most suitable technology like WiMAX and LTE. This approach requires many parameters like RSS, bandwidth, connection cost and delay for the determination of suitable technology. This approach maintains the RSS level higher than the threshold level which helps to reduce the number of redundant handovers. In this, the target technologies have to satisfy four conditions:-

- a) $RSS_k > RSS_{th}$
- b) $C_k < C_{th}$
- c) $D_k < D_{th}$
- d) $B_k > B_{th}$

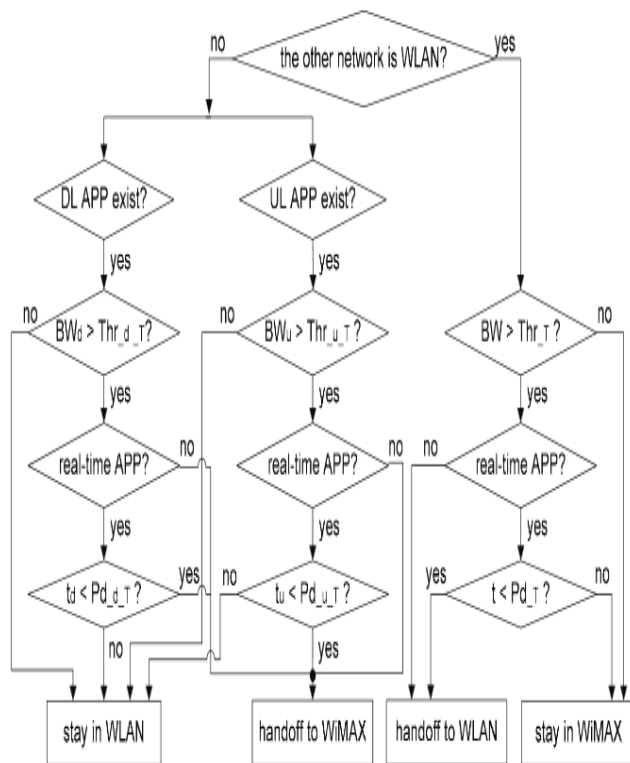


Fig-2: Vertical handover decision algorithm

Where RSS_k is the RSS value of evaluating technology and RSS_{th} is threshold value of RSS, C_k is connection cost for target technology and C_{th} is its threshold value, D_k is technology handover process delay and D_{th} is threshold delay, B_k is technology bandwidth and B_{th} is threshold bandwidth. In this approach, the self learning algorithm is used to update the threshold levels.

The main problem occurs in this approach is that fluctuations take place in the number of handoffs.

4. PROPOSED APPROACH FOR HANDOVER PROCESS

4.1 RSS with fixed hysteresis approach

This approach overcome the disadvantages of previous approaches i.e it minimizes the number of redundant handoffs. This approach is used for the prediction of the technology in the vertical handover process. With the help of this approach the calculation of the RSS value is done by using the concept of transmitted power and fading. There are two types of fading: slow fading and fast fading. Slow fading occurs due to buildings and fast fading due to multipath components. Slow fading is calculated by using formula:

Slow fading = path loss model + shadow fading

Where shadow fading is considered as zero.

$$P_k = 32.44 + 20\log_{10}R(\text{km}) + 20\log_{10}f(\text{MHz}) - G_t(\text{dB}) - G_r(\text{dB})$$

Here P_k is the propagation loss, R is the distance of mobile node from BS and f is the frequency of the network. G_t and G_r are the antenna gains of transmitter and receiver respectively.

When the RSS value is calculated by this method, then the RSS value of the serving BS is compared with the target BS by using formula:

$$RSS_x + h < RSS_y$$

In this formula, RSS_x is the received signal strength from the serving base station and RSS_y is the received signal strength from target base station. H is the hysteresis value. If above given condition is satisfied then the vertical handover process should take place.

5. RESULTS AND DISCUSSION

5.1 Response of path loss and received power of signal

To find out the handover performance, we have to check out the response of path loss and received signal power of mobile node when it moves from one base station to another. When the user moves from BS1 to BS2 its path loss increases but the received power decreases. On the other hand, from BS2 to BS1 the path loss decreases but the received power increases. In the result, the figures show the relation between the path loss and distance and also between received power and distance.

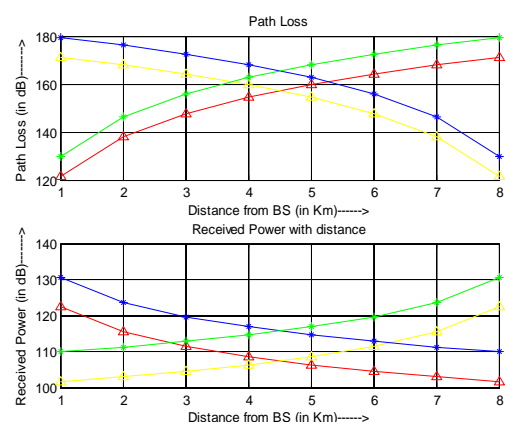


Fig-3: Response of path loss and received signal power

5.2 Selection of network

First of all in this number of evolution networks are selected, then threshold values for bandwidth, received signal strength and estimated time are selected. After that the network which has the bandwidth and received signal strength greater than the threshold value that network is selected as the target network. In this figure we select the 4 number of networks, here the fourth network have the bandwidth and received signal strength greater than threshold value therefore this is selected as target network.

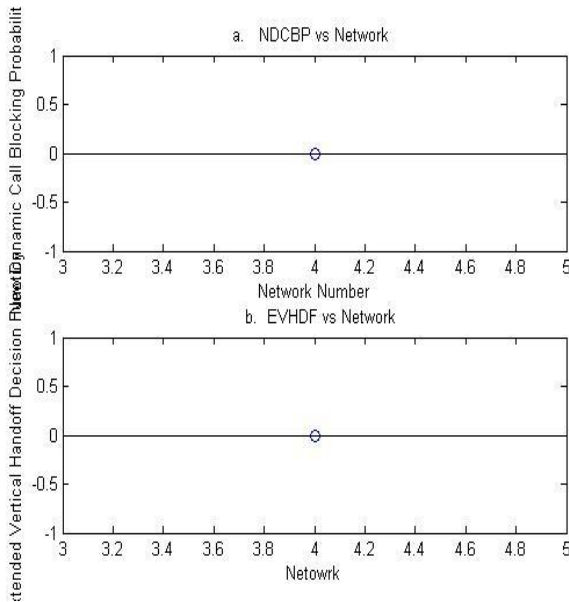


Fig-4: Network selection

5.3 Result for dynamic hysteresis

The figure shows the relation between the hysteresis value and average number of handoffs. In this figure the simple RSS approach and MMTT approach have

the fluctuations in handover process which mean number of redundant handovers occurred, but in case of dynamic h with all adjacent BSs the result is without fluctuations which mean it reduces the number of redundant handoffs.

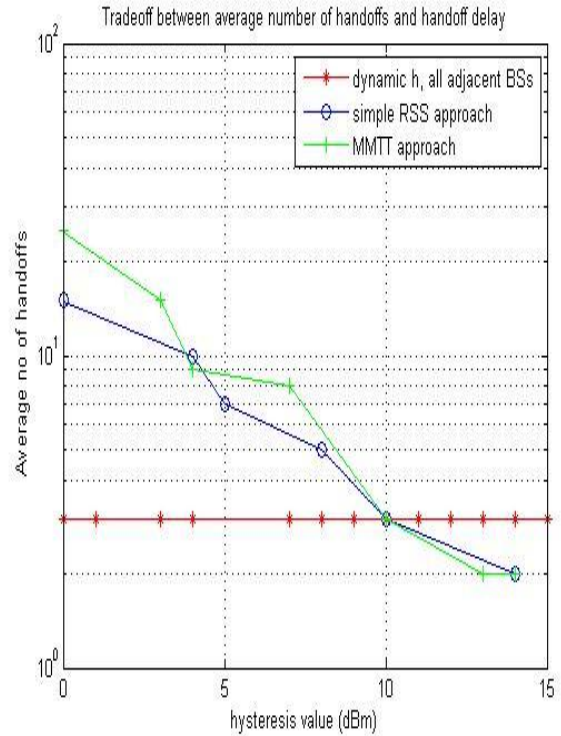


Fig-5: Dynamic hysteresis for handover process

6. CONCLUSION

The purpose of this paper is to select the best network from the heterogeneous networks. For this purpose different parameters like bandwidth and received signal strength are used to find out the performance of handover. Therefore, the BS which has the higher value of bandwidth and received signal strength is selected as target BS. Also the hysteresis technique which is proposed in this paper

helps to minimize the number of unnecessary handoff and give the better results.

REFERENCES

1. Rajiv Chechi, Rajesh Khanna," QoS Based Handover In Heterogeneous Networks", © IEEE,2011.
2. S.V. Saboji, C.B.Akki," Available Bandwidth Estimation in 4G Wireless Networks Using Mobile Agents",International Journal of Research and Reviews in Information Sciences (IJRRIS),Vol. 1, No. 2, June 2011.
3. Z. Becvar, P. MacH, and B. Simak,"Improvement of handover prediction in mobile WiMAX by using two thresholds," Computer Networks, vol. 55, no. 16, pp. 3759–3773, 2011.
4. Yu-Chang Chen, Chen-Chun Yang, Shiang-Chi Tseng, Ya-Bo Hu," Next generation heterogeneous wireless networks with QoS gurantees",IEEE,2011.
5. Sana Sami Mohammad Tahir," Vertical Handoff Algorithm for Heterogeneous Wireless Networks", Al-Rafidain Engineering, Vol.20 No. 3 June 2012.
6. Abhijeet V. Shinde,A.D.Bijwe,"A Novel Handoff Technique for Heterogeneous Wireless Network", International Journal of Emerging Technology and Advanced Engineering, Volume 2, Issue 1, January 2012.
7. A. Bhuvanewari, Dr. E. George Dharma Prakash Raj," An Overview of Vertical Handoff Decision Making Algorithms", I. J. Computer Network and Information Security, 2012.
8. Harnek Singh, Harpreet Singh Bedi, Gurpreet Singh, Satinder singh," Performance Evaluation of Mobile Wimax Networks", International Journal of Enhanced Research in Science Technology & Engineering,Vol. 2 Issue 5,pp.(45-56) May-2013.
9. Ali Nawaz Khan, Waqas Anwer, Ehsan Ullah Munir," Handover Techniques in Mobile WiMAX Networks: Analysis and Comparison", © IDOSI Publications, 2013.
10. Sudesh Pahal,Brahmjit Singh,Ashok Arora," Performance Evaluation of Signal Strength and Residual Time based Vertical Handover in Heterogeneous Wireless Networks", International Journal of Computing and Network Technology,pp.(25-31),2014.
11. M. N. Hindia, A.W. Reza, K.N.Noordin, andA. S.M. Z.Kausar, "Enhancement the handovers accuracy and performance of WiMAX and LTE networks,"in Proceedings of the International Conference on Computer Science and Computational Mathematics(ICCSM '14), 2014.
12. E. Kim, S. Kim, and L. Choonhwa, "Supporting seamless mobility for P2P live streaming," The

- Scientific World Journal, vol. 2014, Article ID 134391, 8 pages, 2014.
13. Harpreet Kaur, Amrit Kaur ,”Various handover management techniques in GSM cellular systems”, International Journal For Technological Research In Engineering, Volume 1, Issue 11, July-2014.
14. Mohammad Nour Hindia, Ahmed Wasif Reza, and Kamarul Ariffin Noordin,” Investigation of a New Handover Approach in LTE and WiMAX”,The Scientific World Journal, Volume 2014.
15. M. Khanand and K. Han, “An optimized network selection and handover triggering scheme for heterogeneous self-organized wireless networks,”Mathematical Problems in Engineering, vol. 2014, Article ID173068, 11 pages, 2014.

Publish Research Article

Dear Sir/Mam,

We invite unpublished Research Paper, Summary of Research Project, Theses, Books and Book Review for publication.

**Address:- North Asian International Research Journal Consortium (NAIRJC)
221, Gangoo Pulwama - 192301**

Jammu & Kashmir, India

Cell: 09086405302, 09906662570,

Ph No: 01933212815

Email:- nairjc5@gmail.com, nairjc@nairjc.com , info@nairjc.com

Website: www.nairjc.com

